
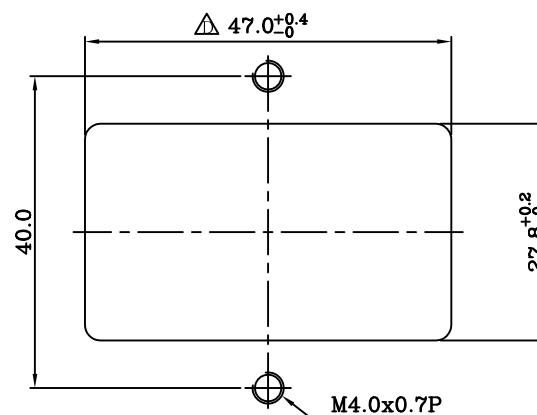
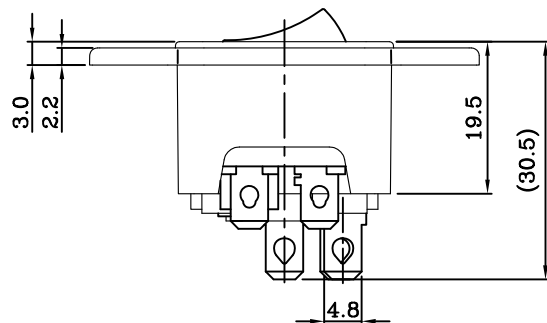
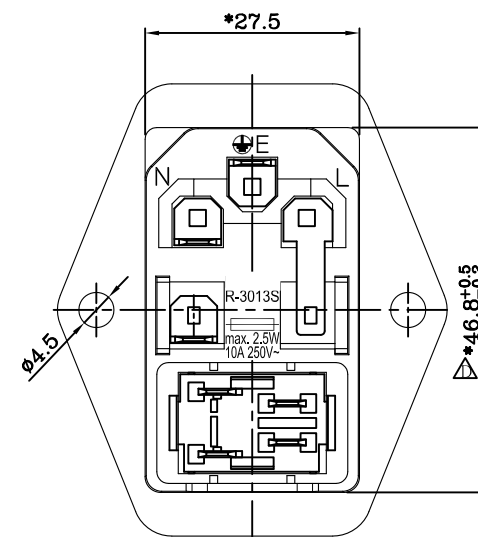
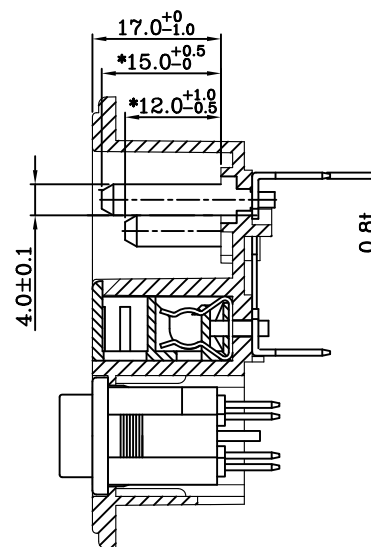


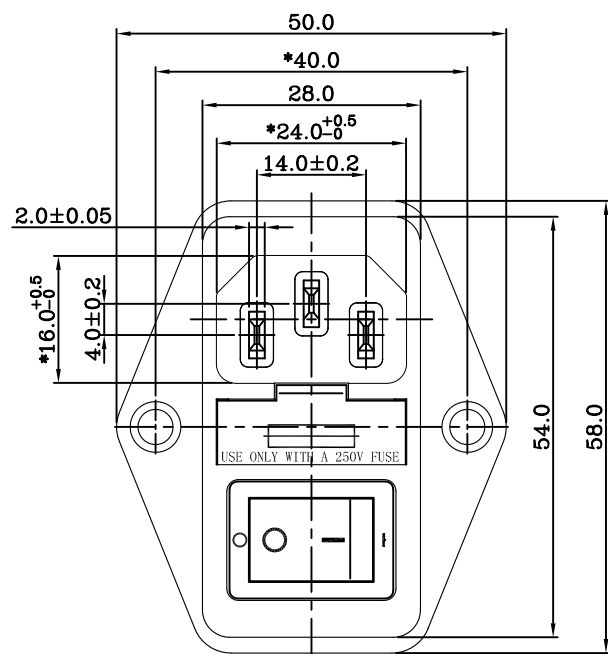

PANEL CUT-OUT


SPECIFICATION:

1. Insulation Resistance: Over 100MΩ at 500V DC.
2. Dielectric strength: 2000V AC 1 Minute.
3. Body Material: Thermoplastic 94V-2~V-0.

Rating:AC 15A 250V	
Mark	Safety Regulation
	CULUS
Rating:AC 10A 250V	
Mark	Safety Regulation
	VDE
	ENEC

產品料號	I/O 形式	備 註
R-3013S(01)	按鍵黑色印刷 I/O	
R-3013S(02)	按鍵透明紅色帶燈	

DRAWING:C:DG\NEW-R\T\3013S\R-3013S (01, 02). DWG

	UNIT	UNIT QTY	SCALE	TOLERANCE X.XX±0.1 XX.XX±0.2 XXX.XX±0.3		PRODUCT NO.	R-3013S (XX)	REV
	mm	1	1:1					
DRAWN BY		APPROVED BY		ID NO	160203A07	INTERIM NO.		D
				DESCRIPTION		NEW NO.		