

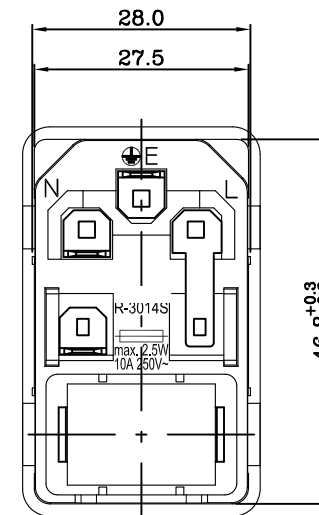
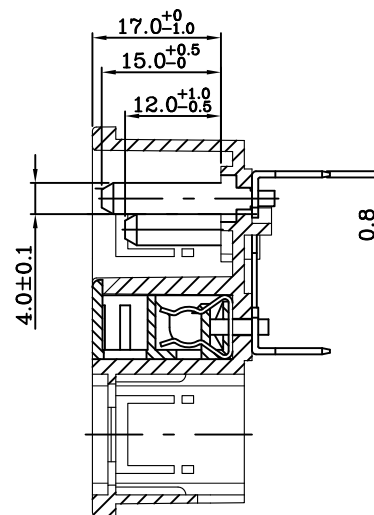
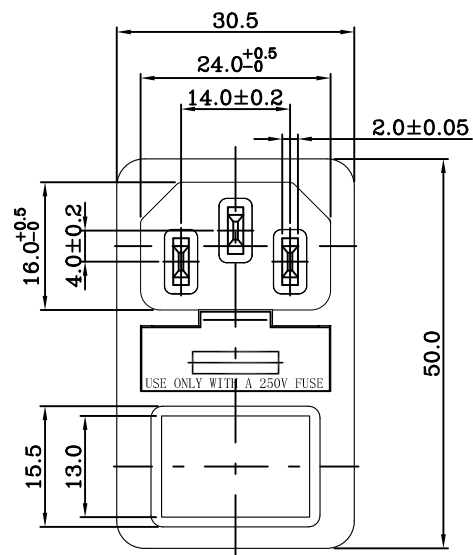


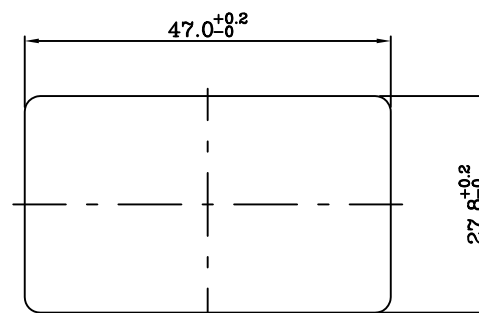

XX	A
10	1.0
15	1.5
20	2.0

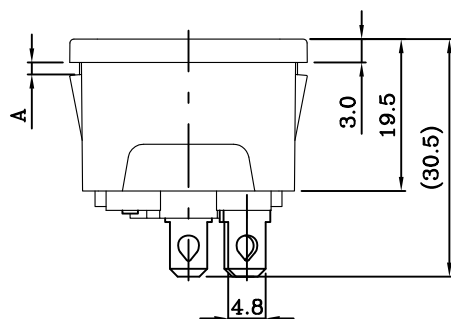



PANEL CUT-OUT

SPECIFICATION:

1. Insulation Resistance: Over 100MΩ at 500V DC.
2. Dielectric strength: 2000V AC 1 Minute.
3. Body Material: Thermoplastic 94V-2~V-0.

Rating:AC 15A 250V	
Mark	Safety Regulation
	CULUS
Rating:AC 10A 250V	
Mark	Safety Regulation
	VDE
	ENEC

DRAWING:C:DG\NEW-R\T\3014S\R-3014S (00) XX. DWG

	UNIT	UNIT QTY	SCALE	TOLERANCE X.XX±0.1 XX.XX±0.2 XXX.XX±0.3		PRODUCT NO.	R-3014S (00) XX	REV
	mm	1	1 : 1					
DRAWN BY		APPROVED BY	ID NO	120313A06	INTERIM NO.		B	
			DESCRIPTION		NEW NO.			