

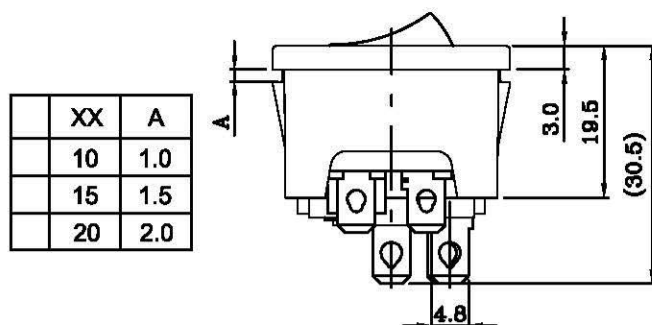
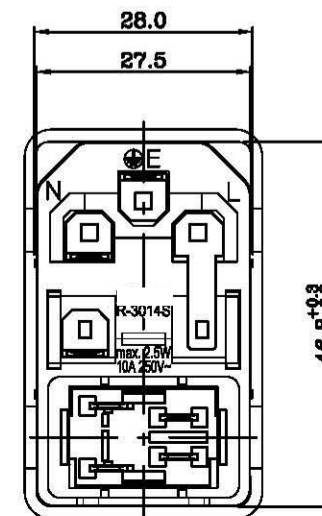
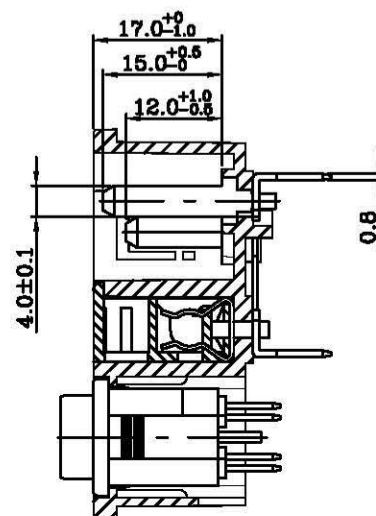


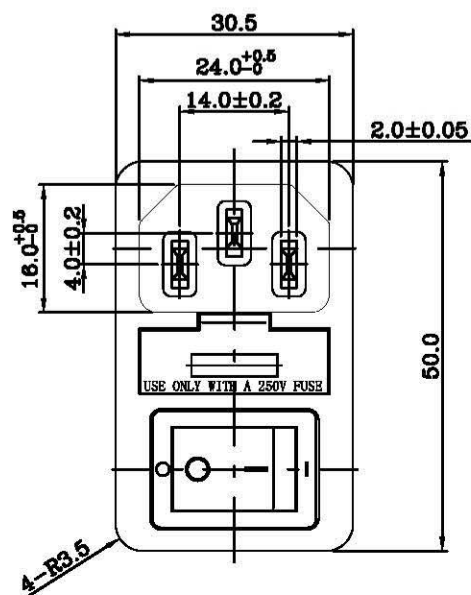

XX	A
10	1.0
15	1.5
20	2.0

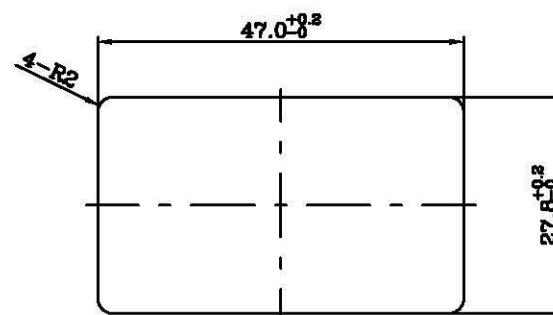

PANEL CUT-OUT

SPECIFICATION:

1. Insulation Resistance: Over 100MΩ at 500V DC.
2. Dielectric strength: 2000V AC 1 Minute.
3. Body Material: Thermoplastic 94V-2~V-0.

Rating:AC 15A 250V	
Mark	Safety Regulation
	CULUS
Rating:AC 10A 250V	
Mark	Safety Regulation
	VDE
	ENEC

DRAWING:C:DG\NEW-R\T\3014S\R-3014S(01, 03, 11)XX.DWG

產品料號	I/O 形式	備 註
R-3014S(01)XX	Cap color: black, printing 0 /—	
R-3014S(03)XX	Cap color:(PC) Red LED Lamp	
R-3014S(11)XX	Cap color:(PC) Green LED Lamp	

	UNIT	UNIT QTY	SCALE	TOLERANCE X.XX±0.1 XX.XX±0.2 XXX.XX±0.3		PRODUCT NO.	R-3014S (01) XX	REV
	mm	1	1:1					
DRAWN BY		APPROVED BY		ID NO	120313A07	INTERIM NO.		E
				DESCRIPTION		NEW NO.		