

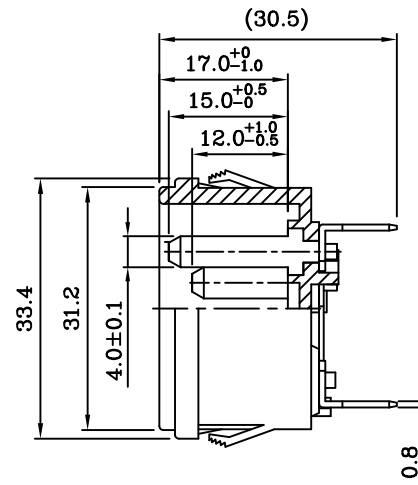
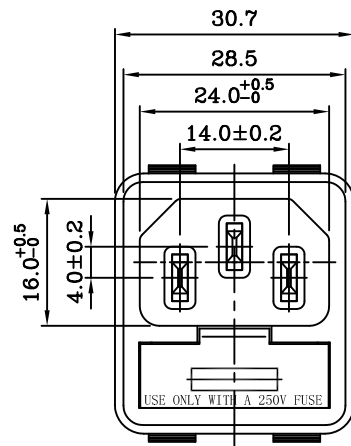


**RECOMMEND
PANEL CUT OUT**

Thickness	L
1.5	32.2
2.0	32.4
2.5	32.6
3.0	32.8

SPECIFICATION:

1. Insulation Resistance: Over 100MW at 500V DC.
2. Dielectric strength: 2000V AC 1 Minute.
3. Body Material: Thermoplastic 94V-2~V-0.

Rating: AC 15A 250V	
Mark	Safety Regulation
	CULUS
Rating: AC 10A 250V	
Mark	Safety Regulation
	VDE
	ENEC

DRAWING: C: DG\NEW-R\T\3016\R-3016 (00). DWG

IMPORTANT THIS DRAWING FOR REFERENCE ONLY 注意：此圖只供參考用

	UNIT	UNIT	Q'TY	SCALE	TOLERANCE X.XX±0.1 XX.XX±0.2 XXX.XX±0.3		PRODUCT NO.	R-3016 (00)	REV
	mm	1	1:1						
DRAWN BY		APPROVED BY		ID NO	101222A16	INTERIM NO.	P060118A06	B	
				DESCRIPTION		NEW NO.			