

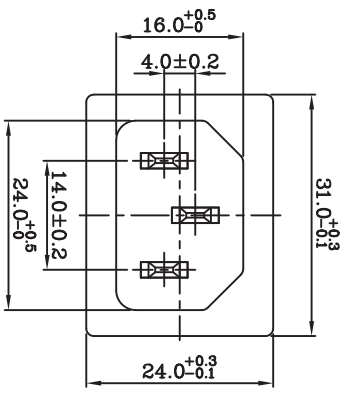


XX	
A	間隙 卡勾有肋
08	0.8
10	1.0
12	1.2
15	1.5
20	2.0
25	2.5
30	3.0
40	4.0

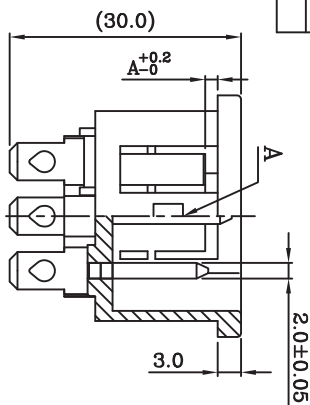

R-301SN(01)XX	R-301SN(02)XX	R-301SN(03)XX

SPECIFICATION:
1. Insulation Resistance: Over 100MΩ at 500V DC.
2. Dielectric strength: 2000V AC 1 Minute.
3. Body Material: Thermoplastic 94V-2~V-0.

Rating:AC 10A 250V	
Mark	Safety Regulation
	VDE
	ENEC
	CCC
Rating:AC 15A 250V	
Mark	Safety Regulation
	cULus

DRAWING:C:\DG\NEW-R\T\301SN\R-301SN(01, 02, 03)XX.DWG

DRAWN BY		UNIT	UNIT QTY	SCALE	TOLERANCE	ID NO	PRODUCT NO.	REV
		mm	1	1:1	X.XX:0.1 XX.XX:0.2 XXX.XX:0.3	110902A03	R-301SN(01)XX	
APPROVED BY							INTERIM NO.	
							NEW NO.	
								G