
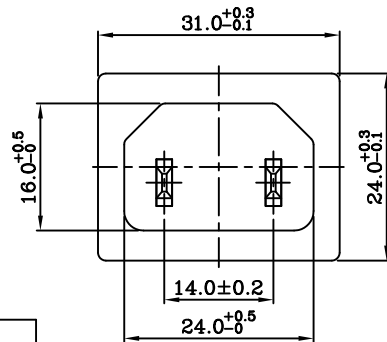


PANEL CUT-OUT

XX		
A	間隙	卡勾有肋
08	0.8	●
10	1.0	●
12	1.2	●
15	1.5	●
20	2.0	●
25	2.5	
30	3.0	●
40	4.0	

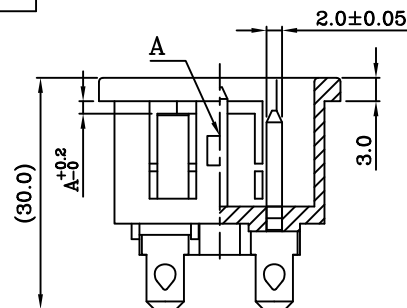


R-301SN(20)XX	R-301SN(29)XX	R-301SN(30)XX

SPECIFICATION:

1. Insulation Resistance: Over 100MΩ at 500V DC.
2. Dielectric strength: 2000V AC 1 Minute.
3. Body Material: Thermoplastic 94V-2~V-0.

Rating:AC 15A 250V	
Mark	Safety Regulation
	UL
	CUL
Rating:AC 10A 250V	
Mark	Safety Regulation
	VDE
	ENEC
	CCC

DRAWING:C:DG\NEW-R\T\301SN\R-301SN(20, 29, 30) XX. DWG

	UNIT	UNIT Q'TY	SCALE	TOLERANCE X.XX±0.1 XX.XX±0.2 XXX.XX±0.3		PRODUCT NO.	R-301SN(20) XX	REV
	mm	1	1:1					
DRAWN BY		APPROVED BY		ID NO	110711A02	INTERIM NO.		F
				DESCRIPTION		NEW NO.		