

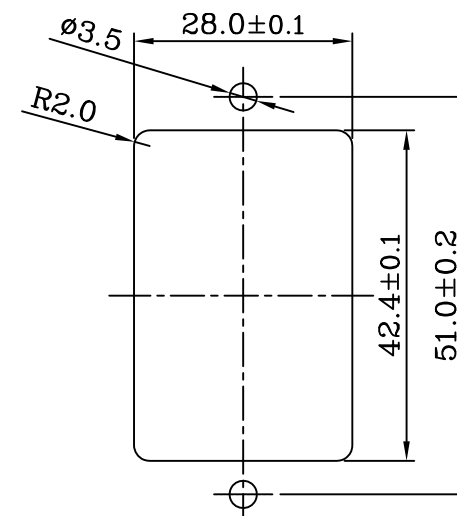
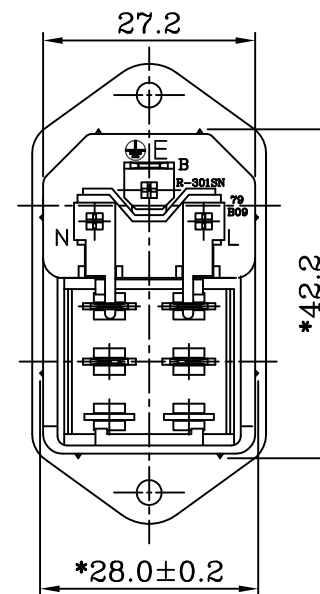
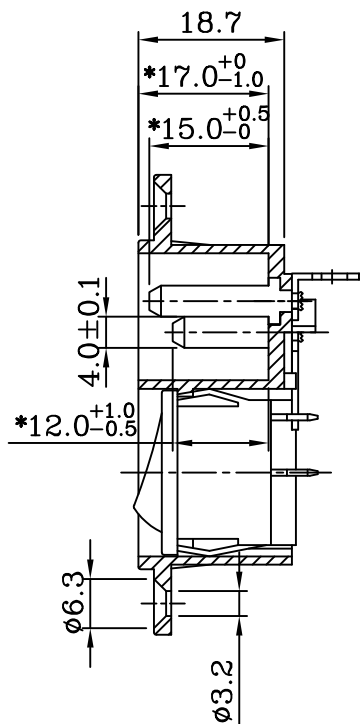


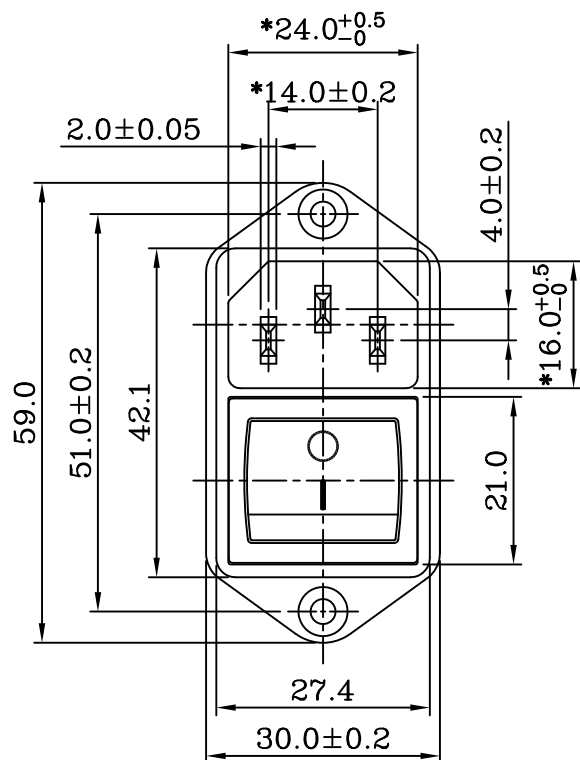

PANEL CUT-OUT

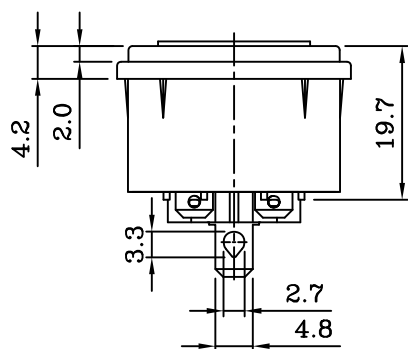

SPECIFICATION (SWITCH) :



- 1.CIRCUIT : DPST ON-OFF.
- 2.CONTACT RESISTANCE : 30mΩ Max.
- 3.INSULATION RESISTANCE : DC 500V 100MΩ Min.
- 4.WITHSTAND VOLTAGE : AC 1000V 1 Minute.
- 5.OPERATION FORCE : 800±300g.
- 6.ELECTRICAL LIFE : 10,000 Cycles At Full Load.
- 7.OPERATING TEMPERATURE RANGE : -25°C ~ +85°C.
- 8.SOLDERING : 280°C FOR 3 Sec.
- 9.DIELECTRIC STRENGTH: 2000V AC 1 Minute.
- 10.BODY MATERIAL : Black Glass-Fiber Thermoplastic. UL 94V-2~0.

SPECIFICATION:

1. INSULATION RESISTANCE: OVER 100MΩ 500V DC.
2. DIELECTRIC STRENGTH: 2000V AC ONE MINUTE.
3. Body Material: Black Glass-Fiber Thermoplastic . UL 94V-2~0

Rating:AC 10A 250V	
Mark	Safety Regulation
	VDE
	ENEC
Rating:AC 15A 250V	
Mark	Safety Regulation
	cULus

DRAWING:C:DG\NEW-R\T\301SN\R-301SN(79). DWG

	UNIT	UNIT	Q'TY	SCALE	TOLERANCE X.XX±0.1 XX.XX±0.2 XXX.XX±0.3		PRODUCT NO.	R-301SN(79)	REV
	mm		1	1:1					
DRAWN BY		APPROVED BY		ID NO	151120A02	INTERIM NO.		D	
				DESCRIPTION		NEW NO.			