



Pin Header Dual Row SMT

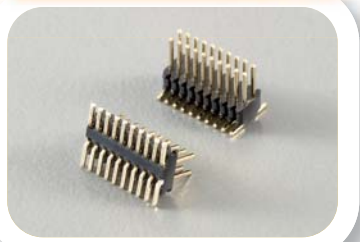


Series: P0MX(C.D)
Pitch: 0.8 (mm)
Base Height: 1.4 mm

Pin Header Single Row Straight

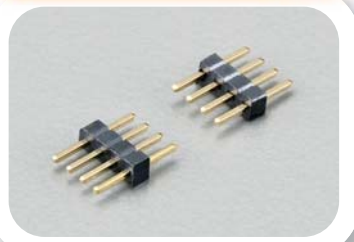


Series: P7SAAS
Pitch: 1.0 (mm)
Base Height: 1.0 mm

Pin Header Dual Row SMT

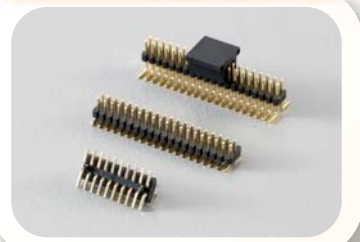

Series: P7MX(C.D)
Pitch: 1.0 (mm)
Base Height: 1.0 mm

Pin Header Single Row Straight

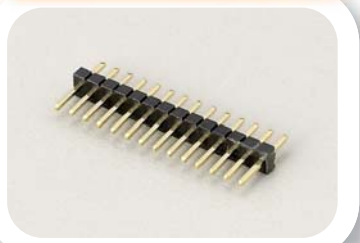

Series: P4SA
Pitch: 1.27 (mm)
Base Height: 1.0/1.2/1.5/1.7
2.0/2.5 mm

Pin Header Dual Row Straight




Series: P4SA
Pitch: 1.27 (mm)
Base Height: 1.0/1.5/1.7
2.0/2.5 mm

Pin Header Single Row Right Angle



Series: P4RA
Pitch: 1.27 (mm)
Base Height: 1.0/1.2/1.5/1.7
2.0/2.5 mm

Pin Header Dual Row Right Angle

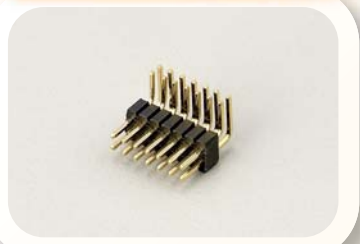

Series: P4SA
Pitch: 1.27 (mm)
Base Height: 1.0/1.5/1.7
2.0/2.5 mm

Pin Header Single Row SMT



Series: P4MX(A.B)
Pitch: 1.27 (mm)
Base Height: 1.0/1.2/1.5/1.7
2.0/2.5 mm

Pin Header Dual Row SMT



Series: P4MX(C.D)
Pitch: 1.27 (mm)
Base Height: 1.0/1.5/1.7
2.0/2.5 mm

Pin Header Dual Row SMT Side Entry



Series: P4MG
Pitch: 1.27 (mm)

Pin Header Multiple Base




Series: P4SX(C-H)
Pitch: 1.27 (mm)

Pin Header Single Row Straight




Series: P3SAAS
Pitch: 1.27x2.54 (mm)
Base Height: 2.54 mm

**Pin Header
Dual Row Straight**

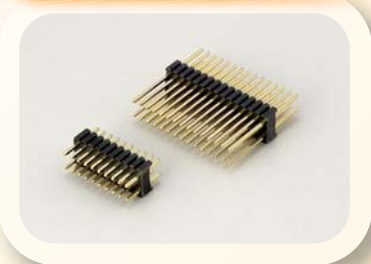


Series: P3SAAD
Pitch: 1.27x2.54 (mm)
Base Height: 2.54 mm

**Pin Header
Single Row Right Angle**

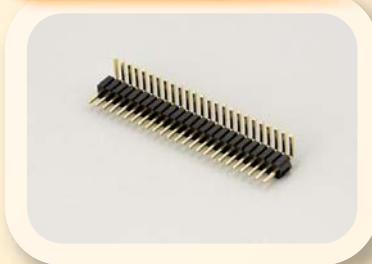

Series: P3RAAS
Pitch: 1.27x2.54 (mm)
Base Height: 2.54 mm

**Pin Header
Dual Row Right Angle**

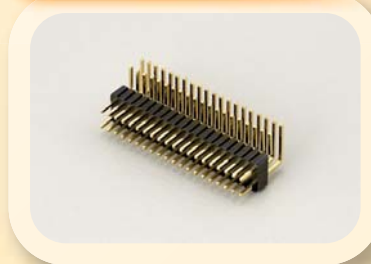

Series: P3RAAD
Pitch: 1.27x2.54 (mm)
Base Height: 2.54 mm

**Pin Header
Single Row SMT**



Series: P3MX(A.B)AS
Pitch: 1.27x2.54 (mm)
Base Height: 2.54 mm

**Pin Header
Dual Row SMT**




Series: P3MCAD
Pitch: 1.27x2.54 (mm)
Base Height: 2.54 mm

**Pin Header
Multiple Base**



Series: P3SX(C~H)
Pitch: 1.27x2.54 (mm)
Base Height: 2.54 mm

**Pin Header
Single Row Straight**

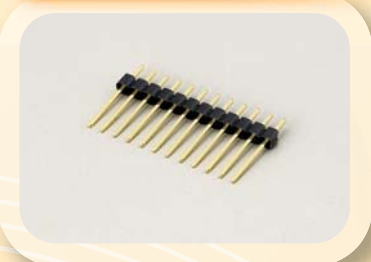


Series: P2SA
Pitch: 2.0 (mm)
Base Height: 1.5/2.0 mm

**Pin Header
Dual Row Straight**



Series: P2SA
Pitch: 2.0 (mm)
Base Height: 1.5/2.0 mm

**Pin Header
Single Row Right Angle**

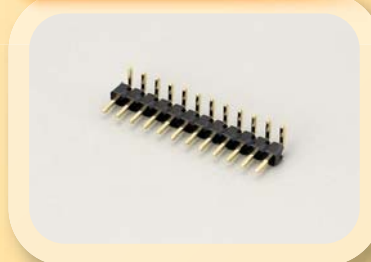


Series: P2RA
Pitch: 2.0 (mm)
Base Height: 1.5/2.0 mm

**Pin Header
Dual Row Right Angle**




Series: P2RA
Pitch: 2.0 (mm)
Base Height: 1.5/2.0 mm

**Pin Header
Single Row SMT**

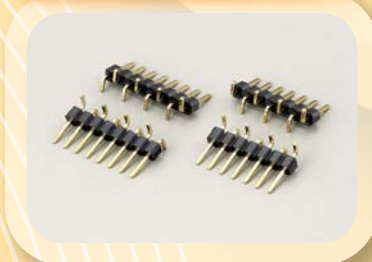

Series: P2MX(A.B)
Pitch: 2.0 (mm)
Base Height: 1.5/2.0 mm


**Pin Header
Dual Row SMT**

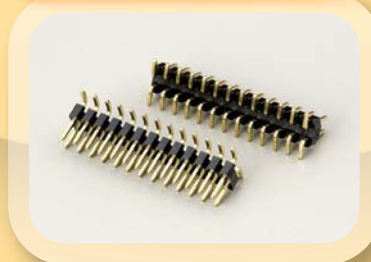

Series: P2MX(C.D)
Pitch: 2.0 (mm)
Base Height: 1.5/2.0 mm


Connectors

**Pin Header
Single Row SMT Side Entry**

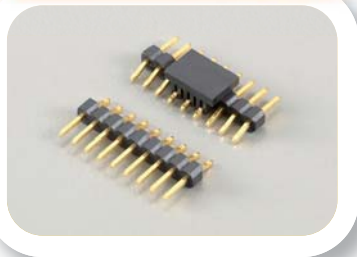


Series: P2MX(E.F)
Pitch: 2.0 (mm)

**Pin Header
Dual Row SMT Side Entry**

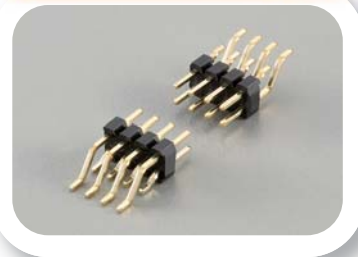

Series: P2MX(G.H)
Pitch: 2.0 (mm)

**Pin Header
Multiple Base**

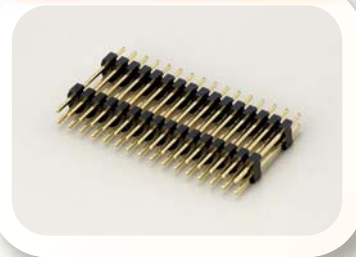


Series: P2SX(C~H.1)
Pitch: 2.0 (mm)
Base Height: 1.5/2.0 mm

**Pin Header
Triple Row Right Angle**




Series: P2RCCT
Pitch: 2.0 (mm)

**Pin Header
Single Row Right Angle**

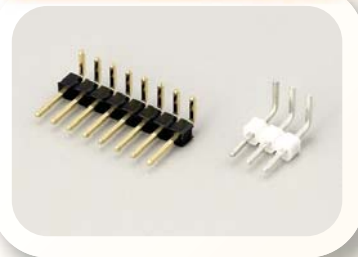


Series: P1RA
Pitch: 2.54 (mm)
Base Height: 1.5/1.7/2.5
3.3 mm

**Pin Header
Dual Row Right Angle**

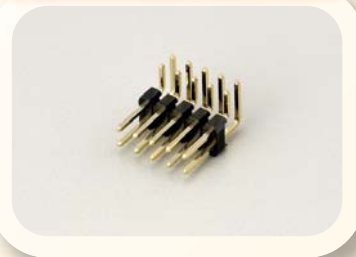


Series: P1RA
Pitch: 2.54 (mm)
Base Height: 1.5/1.7/2.5
3.3 mm

**Pin Header
Single Row SMT**

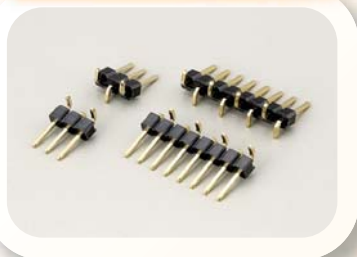


Series: P1MX(A.B)
Pitch: 2.54 (mm)
Base Height: 1.5/1.7/2.5
3.3 mm

**Pin Header
Dual Row SMT**

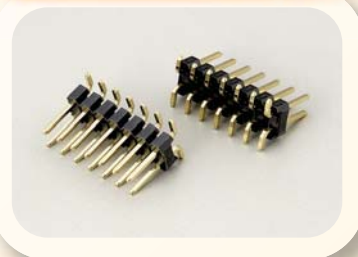


Series: P1MX(C.D)
Pitch: 2.54 (mm)
Base Height: 1.5/1.7/2.5
3.3 mm

**Pin Header
Single Row SMT Side Entry**

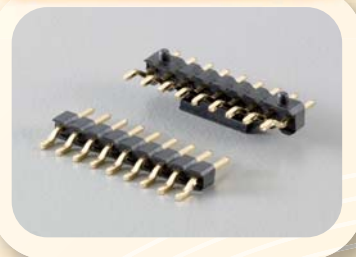

Series: P1MX(E.F)
Pitch: 2.54 (mm)

**Pin Header
Dual Row SMT Side Entry**

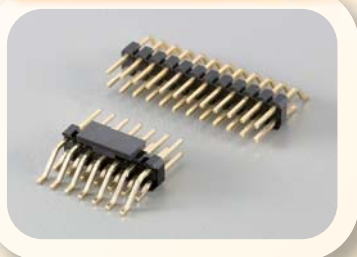


Series: P1MX(G.H)
Pitch: 2.54 (mm)

**Pin Header
Special Type**




Series: P1UD
Pitch: 2.54 (mm)
Base Height: 1.5/1.7/2.5
3.3 mm

**Pin Header
Multiple Base**

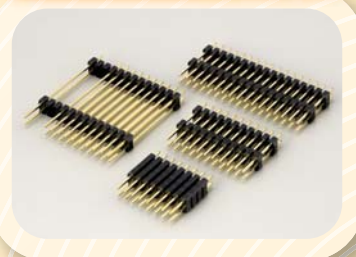


Series: P1SX(C~H.1~2)
Pitch: 2.54 (mm)
Base Height: 1.5/1.7/2.5
3.3 mm

Female Header Dual Row SMT




Series: F0MX(C.D)31D
Pitch: 0.8 (mm)
Base Height: 3.1 mm

Female Header Single Row Straight




Series: F7SC20S
Pitch: 1.0 (mm)
Base Height: 2.0 mm

Female Header Dual Row SMT




Series: F7MX(C.D)20D
Pitch: 1.0 (mm)
Base Height: 2.0 mm

Female Header Single Row Straight




Series: F4SC21S
Pitch: 1.27 (mm)
Base Height: 2.1 mm

Female Header Single Row SMT




Series: F4MX(A.B)21S
Pitch: 1.27 (mm)
Base Height: 2.1 mm

Female Header Dual Row SMT




Series: F4MX(C.D)21D
Pitch: 1.27 (mm)
Base Height: 2.1 mm

Female Header Single Row Straight




Series: F4SC34S
Pitch: 1.27 (mm)
Base Height: 3.4 mm

Female Header Dual Row Straight




Series: F4SC34D
Pitch: 1.27 (mm)
Base Height: 3.4 mm

Female Header Single Row SMT




Series: F4MX(A.B)34S
Pitch: 1.27 (mm)
Base Height: 3.4 mm

Female Header Dual Row SMT




Series: F4MX(C~E)34D
Pitch: 1.27 (mm)
Base Height: 3.4 mm

Female Header Dual Row Side Entry




Series: F4RD34D
Pitch: 1.27 (mm)
Base Height: 3.4 mm

Female Header Single Row Straight



Series: F4SC38S
Pitch: 1.27 (mm)
Base Height: 3.8 mm

Female Header Dual Row Straight

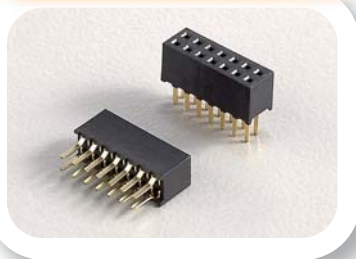


Series: F4SC38D
Pitch: 1.27 (mm)
Base Height: 3.8 mm

Female Header Single Row SMT




Series: F4MX(A.B)38S
Pitch: 1.27 (mm)
Base Height: 3.8 mm

Female Header Dual Row SMT

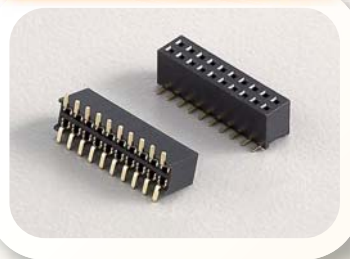


Series: F4MX(C.D)38D
Pitch: 1.27 (mm)
Base Height: 3.8 mm

Female Header Single Row Right Angle

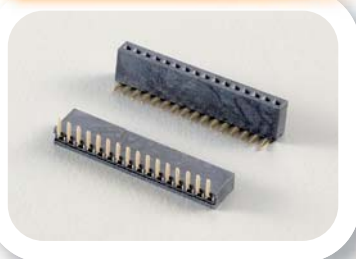


Series: F4RB43S
Pitch: 1.27 (mm)
Base Height: 4.3 mm

Female Header Single Row SMT

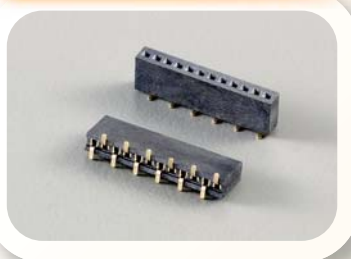


Series: F4MX(A.B)43S
Pitch: 1.27 (mm)
Base Height: 4.3 mm

Female Header Dual Row SMT

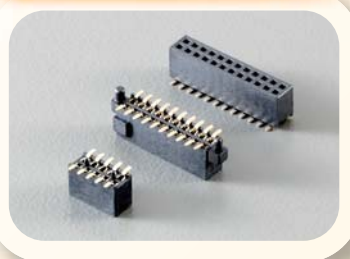


Series: F4MX(C-E)43D
Pitch: 1.27 (mm)
Base Height: 4.3 mm

Female Header Single Row Straight

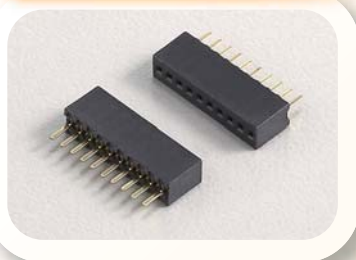


Series: F4SC44S
Pitch: 1.27 (mm)
Base Height: 4.4 mm

Female Header Dual Row Straight

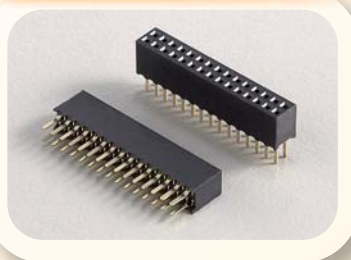


Series: F4SC44D
Pitch: 1.27 (mm)
Base Height: 4.4 mm

Female Header Single Row SMT

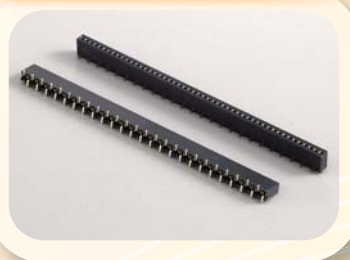


Series: F4MX(A.B)44S
Pitch: 1.27 (mm)
Base Height: 4.4 mm

Female Header Dual Row SMT

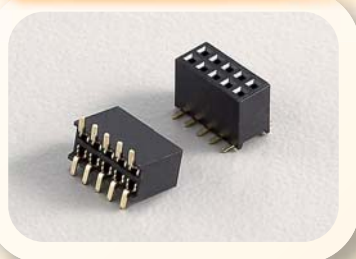


Series: F4MX(C.D)44D
Pitch: 1.27 (mm)
Base Height: 4.4 mm

Female Header Single Row Straight

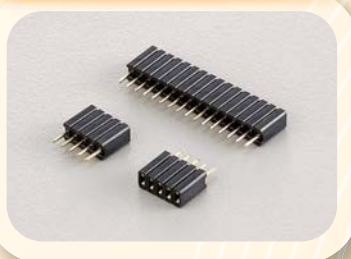


Series: F3SE46S
Pitch: 1.27x2.54 (mm)
Base Height: 4.6 mm

Female Header Dual Row Straight

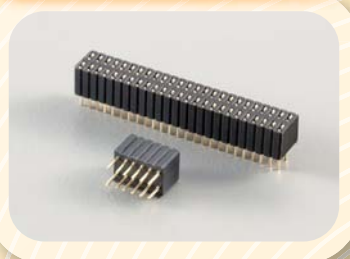

Series: F3SE46D
Pitch: 1.27x2.54 (mm)
Base Height: 4.6 mm

Female Header Dual Row SMT



Series: F3MX(C.D)58D
Pitch: 1.27x2.54 (mm)
Base Height: 5.8 mm

Female Header Dual Row Straight




Series: F3SE85D
Pitch: 1.27x2.54 (mm)
Base Height: 8.5 mm

Female Header Dual Row SMT




Series: F2MX(C.D)21D
Pitch: 2.0 (mm)
Base Height: 2.1 mm

Female Header Dual Row SMT




Series: F2MX(C.D)28D
Pitch: 2.0 (mm)
Base Height: 2.8 mm

Female Header Dual Row Straight




Series: F2SC40D
Pitch: 2.0 (mm)
Base Height: 4.0 mm

Female Header Dual Row SMT




Series: F2MX(C.D)40D
Pitch: 2.0 (mm)
Base Height: 4.0 mm

Female Header Single Row Straight




Series: F2SC43S
Pitch: 2.0 (mm)
Base Height: 4.3 mm

Female Header Dual Row Straight



Series: F2SC43D
Pitch: 2.0 (mm)
Base Height: 4.3 mm

Female Header Single Row Right Angle



Series: F2RB43S
Pitch: 2.0 (mm)
Base Height: 4.3 mm

Female Header Single Row SMT



Series: F2MX(A.B)43S
Pitch: 2.0 (mm)
Base Height: 4.3 mm

Female Header Dual Row Right Angle



Series: F2RA49D
Pitch: 2.0 (mm)
Base Height: 4.85 mm


Female Header Dual Row Side Entry



Series: F2RD51D
Pitch: 2.0 (mm)
Base Height: 5.1 mm


Connectors

**Female Header
Dual Row SMT Side Entry**




Series: F2MF51D
Pitch: 2.0 (mm)
Base Height: 5.1 mm

**Female Header
Dual Row Right Angle**




Series: F2RA54D
Pitch: 2.0 (mm)
Base Height: 5.35 mm

**Female Header
Dual Row Straight**



Series: F2SE55D
Pitch: 2.0 (mm)
Base Height: 5.5 mm

**Female Header
Single Row Straight**




Series: F2SE64S
Pitch: 2.0 (mm)
Base Height: 6.35 mm

**Female Header
Dual Row Straight**




Series: F2SE64D
Pitch: 2.0 (mm)
Base Height: 6.35 mm

**Female Header
Triple Row Straight**




Series: F2SE64T
Pitch: 2.0 (mm)
Base Height: 6.35 mm

**Female Header
Four Row Straight**

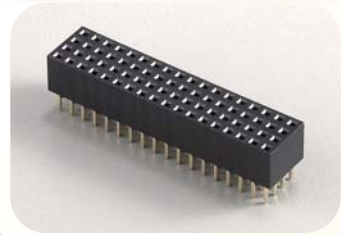


Series: F2SE64F
Pitch: 2.0 (mm)
Base Height: 6.35 mm

**Female Header
Multiple Base**




Series: F2S164X(S.D.T.F)
Pitch: 2.0 (mm)
Base Height: 6.35 mm

**Female Header
Multiple Base**




Series: F2SX(1~3)
Pitch: 2.0 (mm)
Base Height: 6.35 mm

**Female Header
Dual Row Straight**




Series: F2SE71D
Pitch: 2.0 (mm)
Base Height: 7.1 mm

**Female Header
Single Row Side Entry**

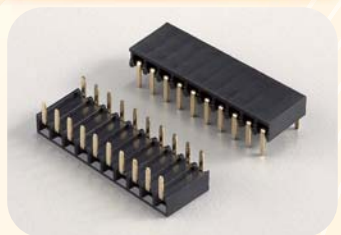

Series: F1RD34S
Pitch: 2.54 (mm)
Base Height: 3.4 mm

**Female Header
Single Row SMT Side Entry**

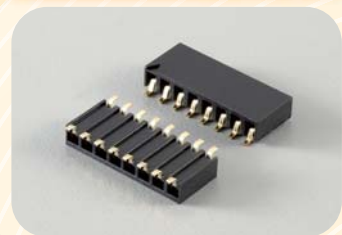


Series: F1MF34S
Pitch: 2.54 (mm)
Base Height: 3.4 mm

Female Header Single Row Straight




Series: F1SE35S
Pitch: 2.54 (mm)
Base Height: 3.5 mm

Female Header Dual Row Straight




Series: F1SE35D
Pitch: 2.54 (mm)
Base Height: 3.5 mm

Female Header Dual Row SMT




Series: F1MX(C.D)35D
Pitch: 2.54 (mm)
Base Height: 3.5 mm

Female Header Single Row Straight




Series: F1SC50S
Pitch: 2.54 (mm)
Base Height: 5.0 mm

Female Header Dual Row Straight




Series: F1SC50D
Pitch: 2.54 (mm)
Base Height: 5.0 mm

Female Header Single Row Dual Entry




Series: F1SX(G.H)50S
Pitch: 2.54 (mm)
Base Height: 5.0 mm
Pin Span: 2.54 mm

Female Header Dual Row Dual Entry




Series: F1SI50D
Pitch: 2.54 (mm)
Base Height: 5.0 mm
Pin Span: 5.08 mm

Female Header Single Row Dual Entry




Series: F1SX(G.H)50S
Pitch: 2.54 (mm)
Base Height: 5.0 mm
Pin Span: 5.08 mm

Female Header Dual Row Dual Entry



Series: F1SI50D
Pitch: 2.54 (mm)
Base Height: 5.0 mm
Pin Span: 7.62 mm

Female Header Single Row Right Angle




Series: F1RB50S
Pitch: 2.54 (mm)
Base Height: 5.0 mm

Female Header Single Row SMT



Series: F1MX(A.B)50S
Pitch: 2.54 (mm)
Base Height: 5.0 mm


Female Header Dual Row SMT



Series: F1MX(C.D)50D
Pitch: 2.54 (mm)
Base Height: 5.0 mm


Connectors

**Female Header
Single Row Straight**




Series: F1SE57S
Pitch: 2.54 (mm)
Base Height: 5.7 mm

**Female Header
Dual Row Straight**




Series: F1SE57D
Pitch: 2.54 (mm)
Base Height: 5.7 mm

**Female Header
Single Row Right Angle**




Series: F1RC57S
Pitch: 2.54 (mm)
Base Height: 5.7 mm

**Female Header
Dual Row Right Angle**




Series: F1RC57D
Pitch: 2.54 (mm)
Base Height: 5.7 mm

**Female Header
Dual Row Side Entry**

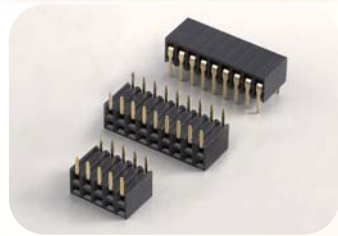


Series: F1RD60D
Pitch: 2.54 (mm)
Base Height: 6.0 mm

**Female Header
Dual Row SMT Side Entry**

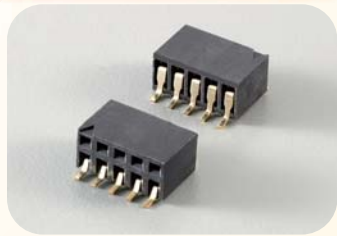


Series: F1MF60D
Pitch: 2.54 (mm)
Base Height: 6.0 mm

**Female Header
Single Row Straight**




Series: F1SK68S
Pitch: 2.54 (mm)
Base Height: 6.8 mm

**Female Header
Dual Row Straight**




Series: F1SK68D
Pitch: 2.54 (mm)
Base Height: 6.8 mm

**Female Header
Single Row Straight**



Series: F1SC71S
Pitch: 2.54 (mm)
Base Height: 7.1 mm

**Female Header
Dual Row Straight**




Series: F1SC71D
Pitch: 2.54 (mm)
Base Height: 7.1 mm

**Female Header
Single Row SMT**




Series: F1MX(A.B)71S
Pitch: 2.54 (mm)
Base Height: 7.1 mm

**Female Header
Dual Row SMT**




Series: F1MX(C.D)71D
Pitch: 2.54 (mm)
Base Height: 7.1 mm

Female Header Single Row Dual Entry




Series: F1SX(G.H)71S
Pitch: 2.54 (mm)
Base Height: 7.1 mm
Pin Span: 3.96 / 5.08 mm

Female Header Dual Row Dual Entry




Series: F1SI71D
Pitch: 2.54 (mm)
Base Height: 7.1 mm
Pin Span: 6.5 / 7.62 mm

Female Header Single Row Straight



Series: F1SA85S
Pitch: 2.54 (mm)
Base Height: 8.5 mm

Female Header Dual Row Straight




Series: F1SA85D
Pitch: 2.54 (mm)
Base Height: 8.5 mm

Female Header Single Row Straight



Series: F1SC85S
Pitch: 2.54 (mm)
Base Height: 8.5 mm

Female Header Dual Row Straight



Series: F1SC85D
Pitch: 2.54 (mm)
Base Height: 8.5 mm

Female Header Single Row SMT



Series: F1MX(A.B)85S
Pitch: 2.54 (mm)
Base Height: 8.5 mm

Female Header Dual Row SMT




Series: F1MX(C.D)85D
Pitch: 2.54 (mm)
Base Height: 8.5 mm

Female Header Single Row Dual Entry




Series: F1SX(G.H)85S
Pitch: 2.54 (mm)
Base Height: 8.5 mm
Pin Span: 3.96 / 5.08 mm

Female Header Dual Row Dual Entry




Series: F1SI85D
Pitch: 2.54 (mm)
Base Height: 8.5 mm
Pin Span: 6.5 / 7.62 mm

Female Header Single Row Straight



Series: F1SE85S
Pitch: 2.54 (mm)
Base Height: 8.5 mm


Female Header Dual Row Straight



Series: F1SE85D
Pitch: 2.54 (mm)
Base Height: 8.5 mm


Connectors

**Female Header
Single Row Right Angle**

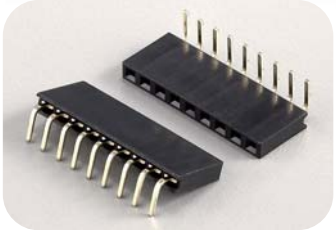


Series: F1RC85S
Pitch: 2.54 (mm)
Base Height: 8.5 mm

**Female Header
Dual Row Right Angle**

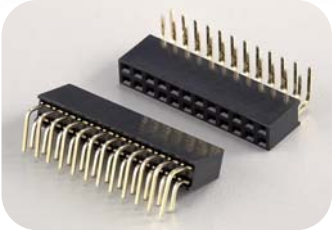


Series: F1RC85D
Pitch: 2.54 (mm)
Base Height: 8.5 mm

**Female Header
Dual Row Straight with Bump**




Series: F1SF85D
Pitch: 2.54 (mm)
Base Height: 8.5 mm

**Female Header
Dual Row Right Angle with Bump**

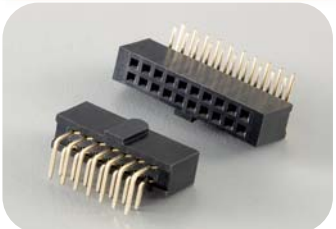


Series: F1RE85D
Pitch: 2.54 (mm)
Base Height: 8.5 mm

**Female Header
Dual Row SMT (with Bump)**

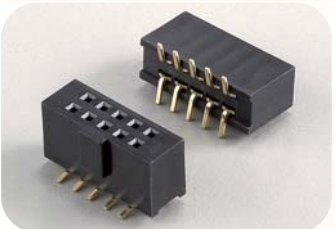

Series: F1MX(C.G)85D
Pitch: 2.54 (mm)
Base Height: 8.5 mm

**Female Header
Dual Row Straight Press Fit**




Series: F1SM85D
Pitch: 2.54 (mm)
Base Height: 8.5 mm

**Female Header
Multiple Base**




Series: F1SX(1~4)85X(S.D)
Pitch: 2.54 (mm)
Base Height: 8.5 mm

**Female Header
Triple Row Straight**

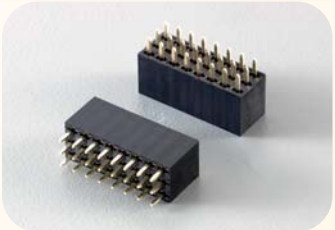


Series: F1SE85T
Pitch: 2.54 (mm)
Base Height: 8.5 mm

**Female Header
Multiple Base**



Series: F1SX(1~4)85T
Pitch: 2.54 (mm)
Base Height: 8.5 mm

**Female Header
Dual Row Straight**



Series: F1SEB0D
Pitch: 2.54 (mm)
Base Height: 11.0 mm

**Box Header
Straight**




Series: BH4SA
Pitch: 1.27 (mm)

**Box Header
Right Angle**




Series: BH4RA
Pitch: 1.27 (mm)

Box Header SMT




Series: BH4MX(C.D)
Pitch: 1.27 (mm)

Box Header Straight



Series: BH2SA
Pitch: 2.0 (mm)

Box Header Right Angle

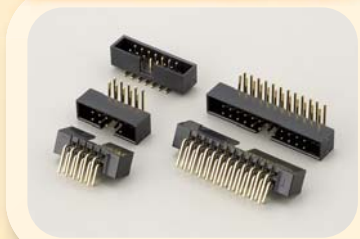

Series: BH2RA
Pitch: 2.0 (mm)

Box Header 45°



Series: BH2RA
Pitch: 2.0 (mm)

Box Header SMT



Series: BH2MC
Pitch: 2.0 (mm)

Box Header Straight




Series: BH1SA
Pitch: 2.54 (mm)

Box Header Right Angle



Series: BH1RA
Pitch: 2.54 (mm)

Box Header SMT



Series: BH1MX(C.D)
Pitch: 2.54 (mm)

Board Spacer SMT



Series: BS4MX(C.D)
Pitch: 1.27 (mm)

Board Spacer SMT



Series: BS4MX(C.D)x(a~j)
Pitch: 1.27 (mm)

Board Spacer SMT



Series: BS4ML1
Pitch: 1.27 (mm)

Board Spacer Straight



Series: C006PF52x
Pitch: 1.27 (mm)

Connectors

**Board Spacer
Straight**



Series: BS1SC/BS2SC
Pitch: 2.54 / 2.0 (mm)

**Board Spacer
Right Angle**



Series: BS1RX(A.B)/BS2RX(A.B)
Pitch: 2.54 / 2.0 (mm)

**Latch Header
Straight**



Series: LH4SA1
Pitch: 1.27 (mm)

**Latch Header
Right Angle**



Series: LH4RA1
Pitch: 1.27 (mm)

**Latch Header
SMT**



Series: LH4MC1
Pitch: 1.27 (mm)

**Latch Header
Straight**



Series: LH2SA
Pitch: 2.0 (mm)

**Latch Header
Right Angle**



Series: LH2RA
Pitch: 2.0 (mm)

**Latch Header
SMT**



Series: LH2MC
Pitch: 2.0 (mm)

**Latch Header
Straight**




Series: LH1SA
Pitch: 2.54 (mm)

**Latch Header
Right Angle**




Series: LH1RA
Pitch: 2.54 (mm)

**Board to Board
Connector Male**

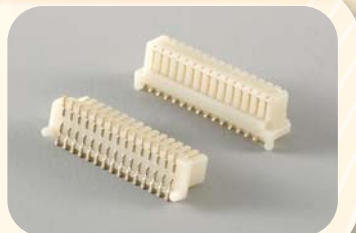

Series: BB080AM
Pitch: 0.8 (mm)

**Board to Board
Connector Female**

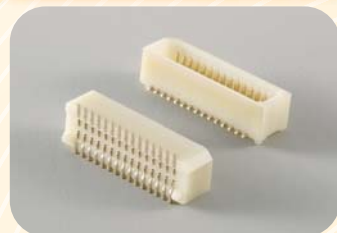

Series: BB080AF
Pitch: 0.8 (mm)

Sheet Metal**Pin****D-SUB Solder**

Series: DBLX(2.3)
Dual Row: 9/15/25/37 pins
High Density: 15/26/44
62 pins

D-SUB Crimp

Series: DBCX(2.3)
Dual Row: 9/15/25/37 pins
High Density: 15/26/44
62 pins

D-SUB DIP Straight

Series: DBSX(2.3)
Dual Row: 9/15/25/37 pins
High Density: 15/26/44
62 pins

D-SUB DIP Right Angle

Series: DBRX(2.3)
Dual Row: 9/15/25/37 pins
High Density: 15/26/44
62 pins

D-SUB Slim

Series: DBEX(2.3)
Dual Row: 9 pins
High Density: 15 pins

D-SUB IDC

Series: FDBX(2.3)
Dual Row: 9/15/25/37 pins

Wire to Board Connector

Housing: 080A-xxP
Terminal: 080A-T
Wafer: 080A-SS(SR)
Pitch: 0.8 (mm)

Wire to Board Connector

Housing: 100E-xxP
Terminal: 100E-T
Wafer: 100E-SS(SR)
Pitch: 1.0 (mm)

Wire to Board Connector


Housing: 100E-xxPD
Terminal: 100E-T
Wafer: 100E-SSD(SRD)
Pitch: 1.0 (mm)

Wire to Board Connector

Housing: 120A-xxP
Terminal: 120A-T
Wafer: 120A-SR
Pitch: 1.2 (mm)


Connectors

Wire to Board Connector



Housing: 125C-xxP
Terminal: 125C-T
Wafer: 125C-WS(WR.SS.SR)
Pitch: 1.25 (mm)

Wire to Board Connector




Housing: 125D-xxP
Terminal: 125D-T
Wafer: 125D-SS(SR)
Pitch: 1.25 (mm)

Wire to Board Connector



Wafer: 125E-SS(SR)
Pitch: 1.25 (mm)

Wire to Board Connector



Wafer: 125F-SR
Pitch: 1.25 (mm)

Board-in Connector



Housing: 125G-xxP
Terminal: 125G-T
Pitch: 1.25 (mm)

Wire to Board Connector



Housing: 150A-xxP
Terminal: 150A-T
Wafer: 150A-WS(WR.SS.SR)
Pitch: 1.50 (mm)

Board-in Connector




Housing: 200E-xxSP/RP
Terminal: 200E-TS(TR)
Pitch: 2.0 (mm)

Wire to Board Connector




Housing: 200F-xxP
Terminal: 200F-T-TP
Wafer: 200F-WS(WR.SS.SR)
Pitch: 2.0 (mm)

Wire to Board Connector



Housing: 200F-xxPD
Terminal: 200F-TD-TP
Wafer: 200F-WSD(WRD.SSD.SRD)
Pitch: 2.0 (mm)

Wire to Board Connector



Housing: 200G-xxP
Terminal: 200G-T
Wafer: 200G-WS(WR)
Pitch: 2.0 (mm)

Wire to Board Connector




Housing: 200K-xxP
Terminal: 200F-TD-TP
Wafer: 200K-WS(WR.SS.SR)
Pitch: 2.0 (mm)

Board-in Connector




Housing: 250A-S1-xxP
Terminal: 250A-S1-TBT2
Pitch: 2.5 (mm)

Wire to Board Connector




Housing: 250B-xxP
Terminal: 250B-T-TP
Wafer: 250B-WS(WR.SS.SR)
Pitch: 2.5 (mm)

Wire to Board Connector




Housing: 250C-xxP
Terminal: 250C-T
Wafer: 250C-WS(WR)
Pitch: 2.5 (mm)

Wire to Board Connector



Housing: 250D-xxP
Terminal: 250D-T
Wafer: 250D-WS(WR)
Pitch: 2.5 (mm)

Wire to Board Connector



Housing: 250E-xxP
Terminal: 250E-T
Wafer: 250E-WS(WR)
Pitch: 2.5 (mm)

Wire to Board Connector




Housing: 250F-xxP
Terminal: 250F-T
Wafer: 250F-WS(WR)
Pitch: 2.5 (mm)

Wire to Board Connector



Housing: 254I-X(1.2)-xxP
Terminal: 254I-TF
Pitch: 2.54 (mm)

Wire to Board Connector



Housing: 254K-xxP
Terminal: 254K-T
Wafer: 254K-WS(WR)
Pitch: 2.54 (mm)

Wire to Board Connector



Housing: 396A-xxP
Terminal: 396A-T-TB
Wafer: 396B-WS(WR.HS.HR)
Pitch: 3.96 (mm)

Wire to Board Connector



Housing: 396C-xxP
Terminal: 396C-T
Wafer: 396C-WS(WR)
Pitch: 3.96 (mm)

Wire to Board Power Connector



Housing: 396D-xxP
Terminal: 396D-T
Wafer: 396D-WS
Pitch: 3.96 (mm)

Wire to Board Connector



Wafer: 400A-SR
Pitch: 4.0 (mm)

Wire to Wire Power Connector



Housing: 4130A-xxM(F)
Terminal: 4130A-TM(TF)

Connectors

Wire to Board Power Connector



Housing: 4155A-xxP
Terminal: 4155A-T
Wafer: 4155A-WS
Pitch: 5.0&7.5 (mm)

Wire to Wire Power Connector



Housing: 4158A-xxM(F)
Terminal: 4158A-TM(TF)

Wire to Wire Power Connector



Housing: 4200A-xxM(F)
Terminal: 4200A-TM(TF)

Wire to Wire Power Connector



Housing: 4236B-xxM(F)
Terminal: 4236B-TM(TF)

Wire to Wire Power Connector




Housing: 4250A-xxM(F)
Terminal: 4250A-TM(TF)

Wire to Board & Wire to Wire Power Connector



Housing: 4300A-2XxxM(F)
Terminal: 4300A-TM(TF)
Wafer: 4300A-WSD(WRD.SRD)

Wire to Board & Wire to Wire Power Connector



Housing: 4420A-xxM(F)
Terminal: 4420A-TM(TF)
Wafer: 4420A-WS(WR)

Wire to Board Power Connector



Housing: 4508A-xxM(F)
Terminal: 4508A-TM(TF)
Wafer: 4508B-TS(TR)
Pitch: 5.08 (mm)

M5 Waterproof Connector Solder Type



Contact: 4 pins

M5 Waterproof Connector Solder Type



Contact: 4 pins

M5 Waterproof Connector PCB Type




Contact: 4 pins

M5 Waterproof Connector PCB Type



Contact: 4 pins

FPC/FFC ZIF SMT Top Entry

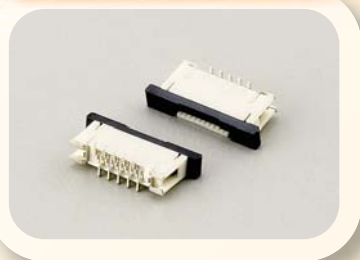


Series: FP4ZSS / FP4ZST
Pitch: 0.5 (mm)
Contact: Single

FPC/FFC ZIF SMT Side Entry




Series: FP4ZUA
Pitch: 0.5 (mm)
Contact: bottom

FPC/FFC ZIF SMT Side Entry

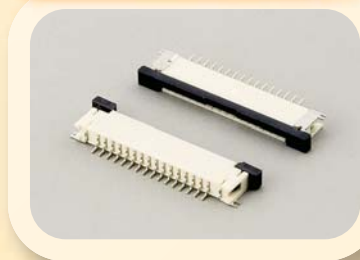


Series: FP3ZLU
Pitch: 1.0 (mm)
Contact: Upper

FPC/FFC ZIF SMT Side Entry

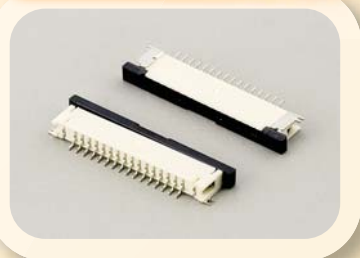


Series: FP3ZLB
Pitch: 1.0 (mm)
Contact: bottom

FPC/FFC ZIF SMT Top Entry

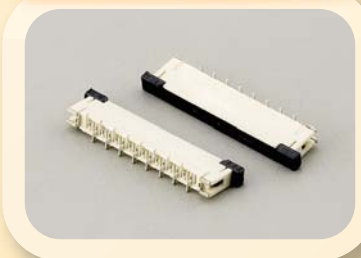


Series: FP3ZSS / FP3ZST
Pitch: 1.0 (mm)
Contact: Single

FPC/FFC non-ZIF Straight

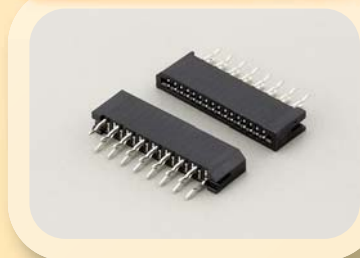

Series: FP3LDS
Pitch: 1.0 (mm)
Contact: Dual

FPC/FFC non-ZIF Right Angle

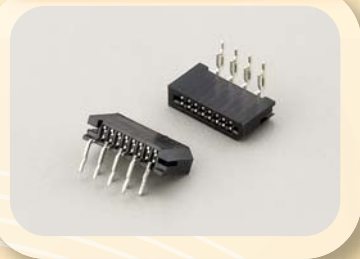

Series: FP3LDR
Pitch: 1.0 (mm)
Contact: Dual

FPC/FFC non-ZIF SMT Top Entry




Series: FP3LSS / FP3LST
Pitch: 1.0 (mm)
Contact: Dual

FPC/FFC non-ZIF SMT Top Entry Parallel




Series: FP3LSP
Pitch: 1.0 (mm)
Contact: Dual

FPC/FFC non-ZIF SMT Side Entry

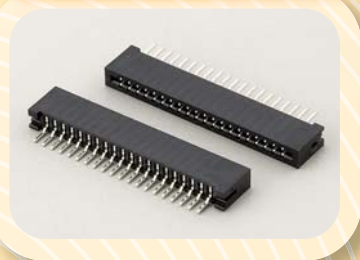


Series: FP3LSR
Pitch: 1.0 (mm)
Contact: Dual

FPC/FFC non-ZIF Straight

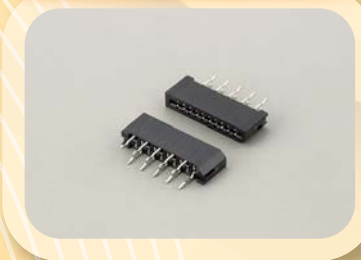

Series: FP2LDS
Pitch: 1.25 (mm)
Contact: Dual

FPC/FFC non-ZIF Right Angle

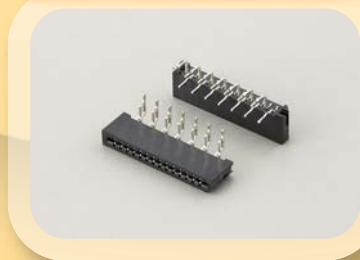


Series: FP2LDR / FP2LDQ
Pitch: 1.25 (mm)
Contact: Dual

FPC/FFC non-ZIF Straight



Series: FP2LSU
Pitch: 1.25 (mm)
Contact: Single

FPC/FFC non-ZIF Right Angle

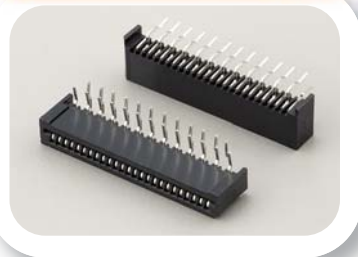


Series: FP2LRU
Pitch: 1.25 (mm)
Contact: Upper

FPC/FFC non-ZIF SMT Side Entry




Series: FP2LSR
Pitch: 1.25 (mm)
Contact: Dual

FPC/FFC non-ZIF SMT Top Entry

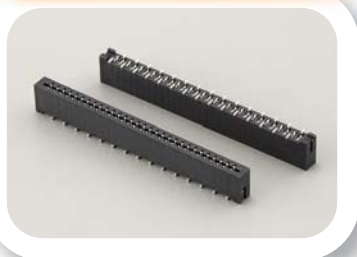


Series: FP2LSS / FP2LST
Pitch: 1.25 (mm)
Contact: Dual

FPC/FFC non-ZIF Straight / Right Angle

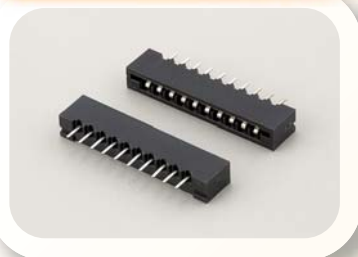


Series: FP1LDS / FP1LDR
Pitch: 2.54 (mm)
Contact: Dual

Pin Header Machined Pin Right Angle

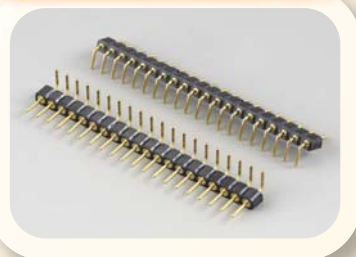


Series: 254C-2X(T.G)-xxR
Pitch: 2.54 (mm)

IC Socket SIP Straight

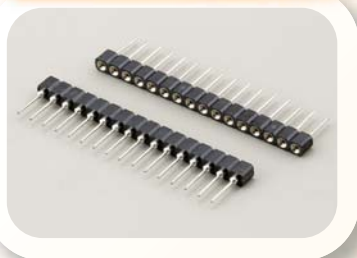


Series: 254C-1X(T.G)-xxP
Pitch: 2.54 (mm)

IC Socket Stamped Pin

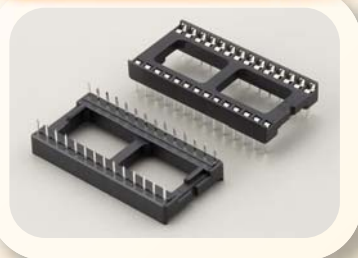

Series: 254M-xxP-X(3.6)
Pitch: 2.54 (mm)

IC Socket Machined Pin

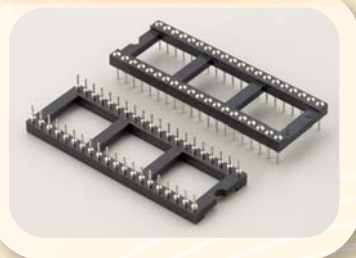

Series: 254N-xxTBAA-X
(3.6)-2
Pitch: 2.54 (mm)

PLCC Socket



Series: 254X-X(S.D)-xxP-XXX
(PBT.PPS)
Pitch: 2.54 (mm)(DIP)
1.27 (mm)(SMT)

Mini Jumper Close



Series: MJ4AXXX
Pitch: 1.27 (mm)

Mini Jumper Close




Series: MJ2A050
Pitch: 2.0 (mm)

**USB 3.0 B Type
Female Right Angle**



Series: UB3H

Wire Harness

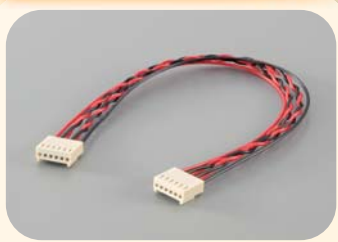

Wire Harness



Wire Harness



Wire Harness



Cable Assembly



FFC



FFC



Jumper Wire



Jumper Wire



Jumper Wire



Jumper Wire

