





317A
USB 2.0 DIP Type
Positions:04,08




317D
USB 2.0 SMT
Positions:04

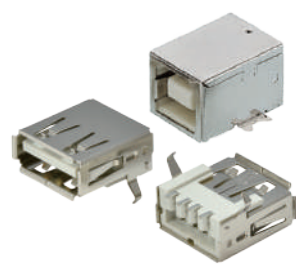


317D(M1)
micro USB 2.0 AB Type (Combo Solder)
Positions:05

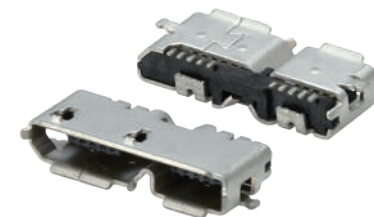

317D(D2)
micro USB 3.0 B SMT
Positions:10

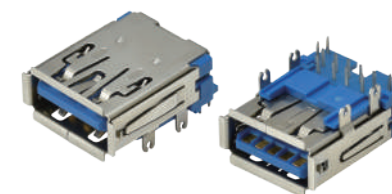


377A(F1)
USB 3.1 A Receptacle
(Power delivery available)
Positions:10

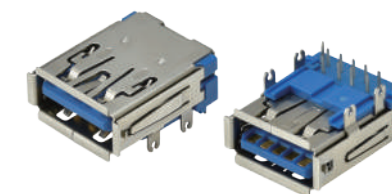

377A(FD)
USB 3.1 A Female Conn.
Positions:09



317Z
Mini USB 2.0
Positions:05

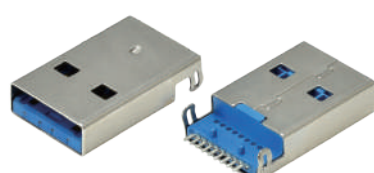

317D(S2)
USB 3.0 A Plug SMT
Positions:09



377A(S3)
USB 3.0 Conn. A Type Female Dual Port
Positions:18



377D(FA)
USB 3.2 Conn. 20G A Type SMT
Positions:08



377A(FL)
USB 3.1 A Female Conn. DIP CH:12.58mm
Right Angle
Positions:09



317J(FC)
USB 4 Type C Receptacle Right Angle
Top-Mount
Positions:24



377D(S1)
USB 3.0 Conn. A Type Female SMT
Positions:09



377A(S6)
USB 3.0 Conn. A Type Female
Positions:09



377A(S4)
USB 3.0 Conn. A Type Female DIP
Positions:09



317J(F3)
USB Type C Receptacle Right Angle
Top-Mount
Positions:24




317D(F4)
USB Type C Receptacle Dual SMT
Top-Mount
Positions:24



349A(F5)
USB Type C Receptacle Waterproof
Top-Mount
Positions:24




377A(S7)
USB 3.0 Conn. B Type Female DIP
Right Angle
Positions:09

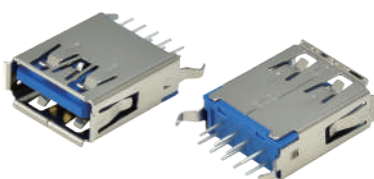


377A(S8)
USB 3.0 Conn. A Type Female
Straight
Positions:09




377A(SB)
USB 3.0 Conn. A Type Female
Up Right Angle
Positions:09

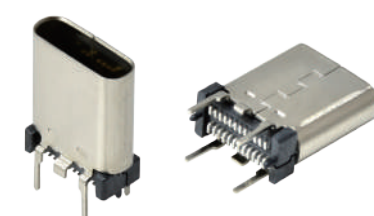

317D(F7)
USB Type C Receptacle Vertical
Height:9.3mm
Positions:24

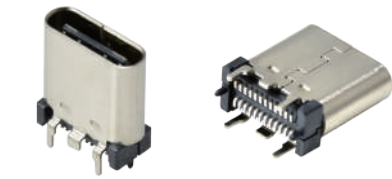

317D(F7)
USB Type C Receptacle Vertical
Height:10.5mm
Positions:24

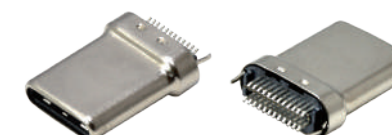

317C(F2)
USB Type C Plug Extrusion Dual SMT
Positions:24