

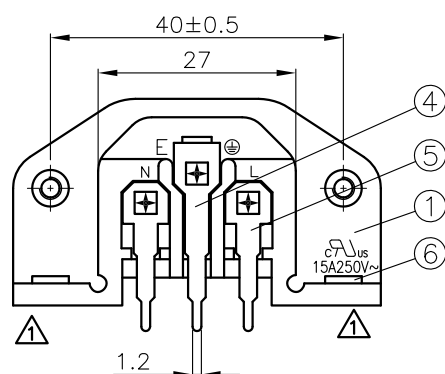
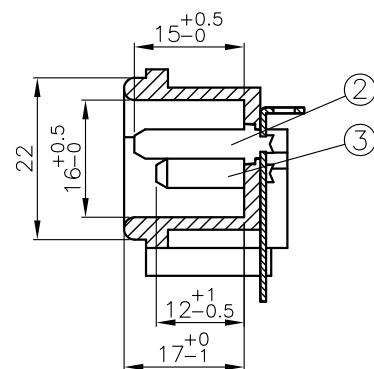
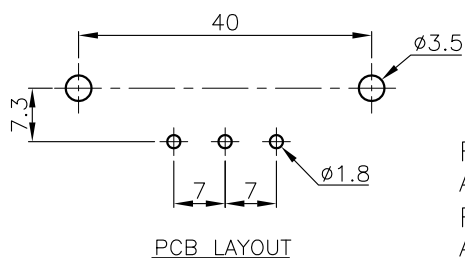
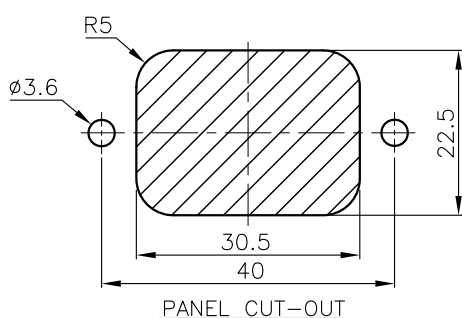
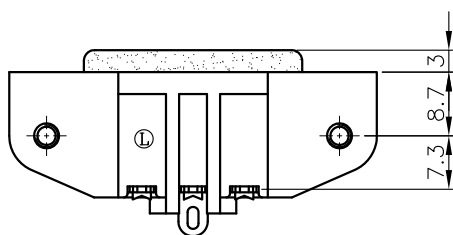
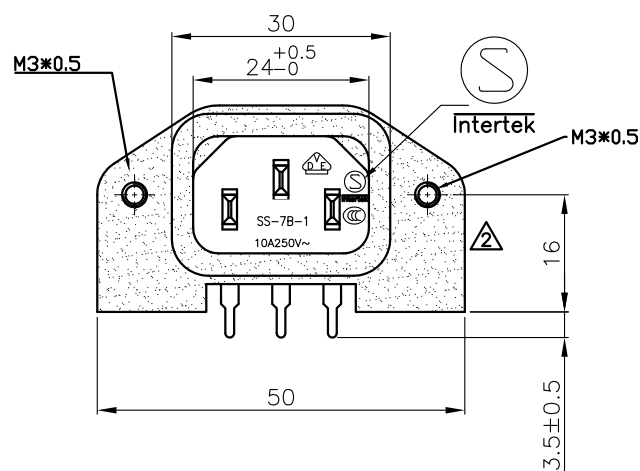


SS-7B-1

SCALE : 1:1

UNIT : mm

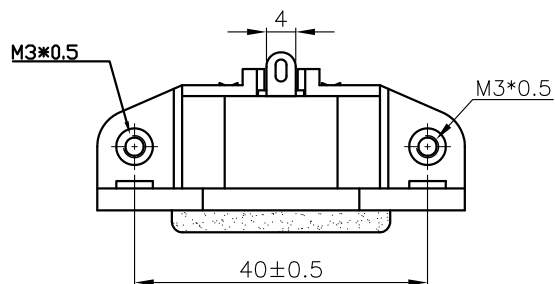

Rating: 15A 250V AC
 Approvals: cUL/UL
 Rating: 10A 250V AC
 Approvals: VDE/SEMKO/CCC

6	Nut M3*0.5mm Ni-Plated	4
5	Soldering PIN Brass Strip t=0.8mm Tin-Plated	2
4	Soldering PIN Brass Strip t=0.8mm Tin-Plated	1
3	Contact PIN Brass Strip t=2mm Ni-Plated	2
2	Contact PIN Brass Strip t=2mm Ni-Plated	1
1	Body Insulator NYLON Black Color	1



③	→		
②	⊙ → ⊙		
①	CSA → cUL+UL (UL V2 Rated)		
NO	DESCRIPTION	APPROVED	DATE

APPROVED: 洪 銘福 2021.07.05	CHECK: 蔡 伯林 2021.07.05	DRAWER: 謝 祺祥 2021.07.05	MATERIAL NO: SS-7B-1-P7Nut
YUN			DRAWING NO: 900499

DIMENSIONAL TOLERANCES	
GRADATION	TOLERANCE
X	±0.4
X.X	±0.3
X.XX	±0.1
ANGLE	±1°

ENGINEER NO: TWI-K-1E21(D)