

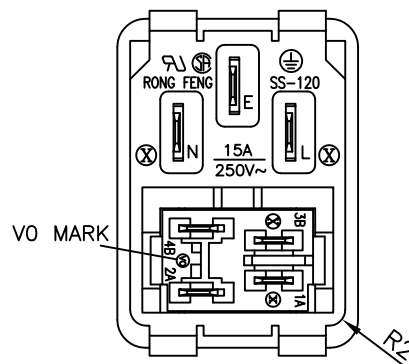
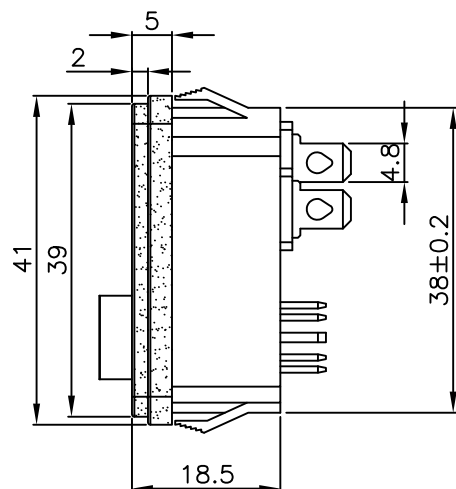




SS-120

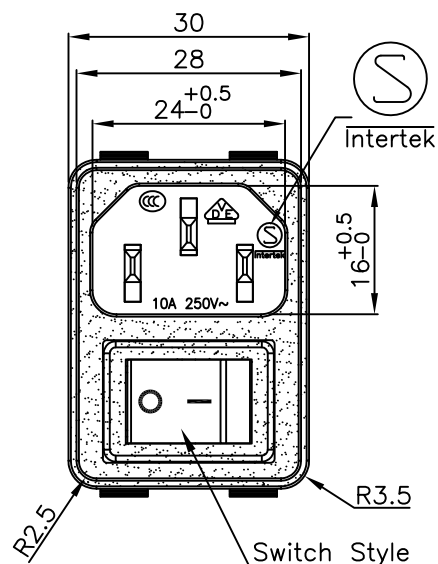


SWITCHING CIRCUIT



SOCKET(SS-120)	SWITCH(RF-1003)
Rating:15A 250V AC Approvals:UL/CSA Rating:10A 250V AC Approvals:VDE/SEMKO/CCC	Rating:10GPA/250V AC 50/60Hz T85 TV-5/125V AC 50/60Hz T85 Approvals: UL/cUL Rating:8A/80A 250V AC 1E4 T85 10(4)A 250V AC 1E4 T85 Approvals: ENEC/CQC/KTL

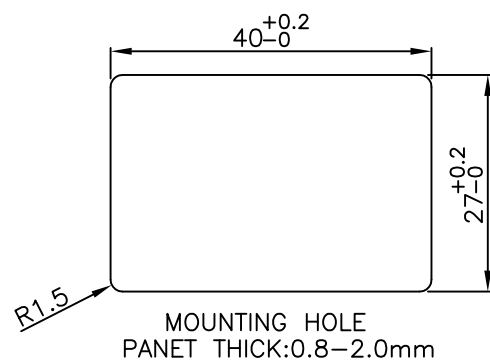

Part No.	Button Printing	Body Color	Button Color	Lamp Type	Rating	Ⓥ0
SS-120-BEL3BB81		White	Black	Without Lamp	10A	
SS-120-BEL3BB81V		White	Black	Without Lamp	10A	V0
SS-120-BEL3B181V		White(移印)	Black	Without Lamp	10A	V0
SS-120-BEL3BR11	o -	White	Black	AC110V	10A	
SS-120-BEL3BR31		White	Black	AC220V	10A	
SS-120-BEL3BB31		White	Black	AC220V	10A	
SS-120-BEL3BR51		White	Black	Red	AC110V&AC220V	10A
SS-120-BEL3BG51		White	Black	Green	AC110V&AC220V	10A
SS-120-BEL1BB81	o •	White	Black	Without Lamp	10A	
SS-120-BEL1BR81		White	Black	Red	Without Lamp	10A
SS-120-BEL5BB81			Black	Black	Without Lamp	10A
SS-120-BEL5BB81V			Black	Black	Without Lamp	10A
SS-120-BEL6BB81		White	Black	Black	Without Lamp	10A
SS-120-BEL6BB81V		White	Black	Black	Without Lamp	10A
SS-120-BEL8BB81	OFF ON	White	Black	Black	Without Lamp	10A
SS-120-BEL8BB81V		White	Black	Black	Without Lamp	10A
SS-120-BELABB81	o i	White	Black	Black	Without Lamp	10A

5	→			GENERAL TOLERANCE		approved	checked	designed	drawn	ALL SIZE ARE IN	MM	
4	→			GRADATION	TOLERANCE				YUN	SCALE	2:1	
3	→			X	±0.4					MAT'L	**	
2	SS-120-BEL3BB81V /A50H1 Mat			X.X	±0.3					MATERIAL NO.		
1	Add SS-120-BELABB81			X.XX	±0.1	COMPONENTSLTD		SS-120-BEL		930634		
NO.	DESCRIPTION	APPROVED	DATE	ANGLE	±1°							